

ATTACHMENT H – CIRQA TRANSPORT INVESTIGATIONS

DRAFT



FORMER METCASH SITE, KIDMAN PARK CODE AMENDMENT

TRANSPORT INVESTIGATIONS REPORT



DISCLAIMER

The information and data contained within this document are the property of CIRQA Pty Ltd and copyright. This document and the information contained therein is for the use of the authorised Client noted below. The document may not be used, copied, reproduced or modified in whole or in part for any purpose other than for which it was supplied by CIRQA Pty Ltd. CIRQA Pty Ltd accepts no responsibility or liability to any other party who may use or rely upon this document or the information contained therein.

DOCUMENT CONTROL

Report title: Former Metcash Site, Kidman Park
Code Amendment Transport Investigations Report

Project number: 21216

Client: Fairland

Client contact: Scott Searle

Version	Date	Details/status	Prepared by	Approved by
Draft	25 Oct 21	For review	JJB	BNW
V1.0	29 Oct 21	For submission	JJB	BNW
V1.1	15 Dec 21	Adjusted yields	JJB	BNW
V1.2	14 Feb 22	Council feedback	JJB	BNW
V1.3	18 Feb 22	Corrected yields	JJB	BNW
V1.03	01 Mar 22	Typographical edits	JJB	BNW

CIRQA Pty Ltd

ABN 12 681 029 983

PO Box 144, Glenside SA 5065

150 Halifax Street, Adelaide SA 5000

(08) 7078 1801

www.cirqa.com.au

TABLE OF CONTENTS

1.	EXECUTIVE SUMMARY	1
2.	BACKGROUND	4
2.1	AFFECTED AREA	4
2.2	ADJACENT ROAD NETWORK	5
2.3	WALKING AND CYCLING	7
2.4	PUBLIC TRANSPORT	8
3.	POTENTIAL REZONING AND FUTURE DEVELOPMENT	9
3.1	LAND USE AND YIELD	9
3.2	ACCESS ARRANGEMENTS AND INFRASTRUCTURE	9
4.	TRAFFIC GENERATION AND DISTRIBUTION	13
4.1	EXISTING MOVEMENTS	14
4.2	FORECAST MOVEMENTS	14
4.3	KIDMAN PARK NORTH DPA & THE ALDI DEVELOPMENT	16
5.	TRAFFIC IMPACT	17
5.1	VALETTA ROAD/FINDON ROAD INTERSECTION	18
5.2	FINDON ROAD/HARTLEY ROAD INTERSECTION	20
5.3	FINDON ROAD/GRANGE ROAD INTERSECTION	21
5.4	ACCESS POINTS	21
5.5	VALETTA ROAD	22
5.6	INTERNAL LAYOUT	22
5.7	OTHER EXTERNAL CONSIDERATIONS	23
APPENDIX A: BASE SCENARIO VOLUMES		
APPENDIX B: FUTURE SCENARIO VOLUMES		
APPENDIX C: FINDON ROAD/VALETTA ROAD SIDRA RESULTS		
APPENDIX D: FINDON ROAD/HARTLEY ROAD SIDRA RESULTS		
APPENDIX E: FINDON ROAD/GRANGE ROAD SIDRA RESULTS		
APPENDIX F: NEW FINDON ROAD INTERSECTION SIDRA RESULTS		

1. EXECUTIVE SUMMARY

CIRQA has been engaged to undertake transport investigations to inform the Code Amendment for the potential rezoning of the former Metcash site at Findon Road, Kidman Park. This report summarises investigations undertaken in respect to traffic and transport impacts of the proposed rezoning.

Specifically, this report contains advice in respect to the following matters:

- **site access** – review of the number, location and treatments for site access points;
- **external road network impacts** – comparative analysis of conditions on the adjacent road network associated with the existing zoning/land uses and the proposed zoning/land uses including analysis of key adjacent intersections on Findon Road;
- **public transport** – review of public transport provisions for the site; and
- **walking and cycling** – review of walking and cycling provisions for the site (both internal and external).

Discussions have been held with both the City of Charles Sturt and the Department for Infrastructure and Transport (DIT) in respect to the proposed rezoning. The investigations have taken into account comments provided by both authorities.

High frequency bus services operate adjacent the site on Valetta Road with additional services on Findon Road. These services provide convenient access to/from key destinations including the Adelaide CBD and major retail precincts. There are also strong walking and cycling connections surrounding the site including the River Torrens Linear Trail (a major shared path which provides close and convenient access to/from the CBD and other destinations). These close proximity of these services and facilities will reduce reliance on private motor vehicles and support the higher density apartments proposed within the Affected Area.

The subject transport investigations have included consideration of previous transport investigations undertaken by CIRQA for the Kidman Park North Development Plan Amendment (DPA) and traffic analyses prepared for the City of Charles Sturt in respect to various intersections on Findon Road in the vicinity of the Affected Area. Notably, the forecast yields for the Affected Area are less than those previously assumed for the previous investigations. For the purposes of these transport investigations, it has been assumed that the Affected Area

will accommodate approximately 350 dwellings within the former Metcash site, 40 dwellings on 5-7 Valetta Road plus a small portion of commercial land uses.

The traffic assessment has assumed that primary access to the Affected Area will occur via a single all movements intersection on Valetta Road, and an all-movements intersection and two left-in/left-out intersections on Findon Road (four primary access points in total). Additional access points for both existing and future commercial development in the vicinity of the north-eastern corner of the site has also been assumed (including retention of existing access arrangements for the commercial properties at 5 and 7 Valetta Road).

Traffic volumes have been assessed for the both the existing land uses and those which could be developed if the Affected Area is rezoned as proposed. The assessment indicates that there would be an increase in traffic volumes associated with the site. However, this would be offset by a reduction in the number and size of heavy vehicles associated with the existing land uses (including reduced movements by Semi-Trailers and B-Doubles). Specifically, the redevelopment is (conservatively) forecast to generate 52 am peak hour and 87 pm peak hour additional movements, respectively. Once distributed to the various access points and movements at surrounding intersections, the impact on any one location is relatively low (particularly once considered in the context of reduced commercial vehicle volumes).

SIDRA intersection modelling software has been used to provide the comparative analysis of traffic impacts. The modelling analysis has identified the following key outcomes:

- the intersection of Findon Road/Valetta Road will require an upgrade to accommodate the future traffic volumes associated with the rezoning and redevelopment of the Affected Area;
- the proposal would slightly improve conditions in respect to the Findon Road/Hartley Road intersection. While the intersection is over capacity and an upgrade would be desirable, it is considered that this is associated with existing volumes and not the specifically the proposal;
- the future volumes would result in minimal change in conditions at the intersection of Findon Road/Grange Road (and, for some movements, will improve conditions). As with the Hartley Road intersection, an upgrade would ultimately be desirable but would not be directly required as a result of the rezoning and future redevelopment.

On the basis of the transport investigations, it is considered that adequate access provisions can be implemented for the Affected Area. Additionally, subject to upgrades recommended at the intersection of Findon Road/Valetta Road

being implemented, it is considered that the proposed will either retain similar conditions to the background traffic scenario or improve them.

2. BACKGROUND

2.1 AFFECTED AREA

The Affected Area comprises the former Metcash site at Kidman Park as well as two additional parcels of land on Valetta Road. Specifically, the Affected Area includes the following land:

- 406-412 Findon Road;
- 414-450 Findon Road;
- 5 Valetta Road; and
- 7 Valetta Road.

Figure 1 illustrates the Affected Area and the adjacent road network.

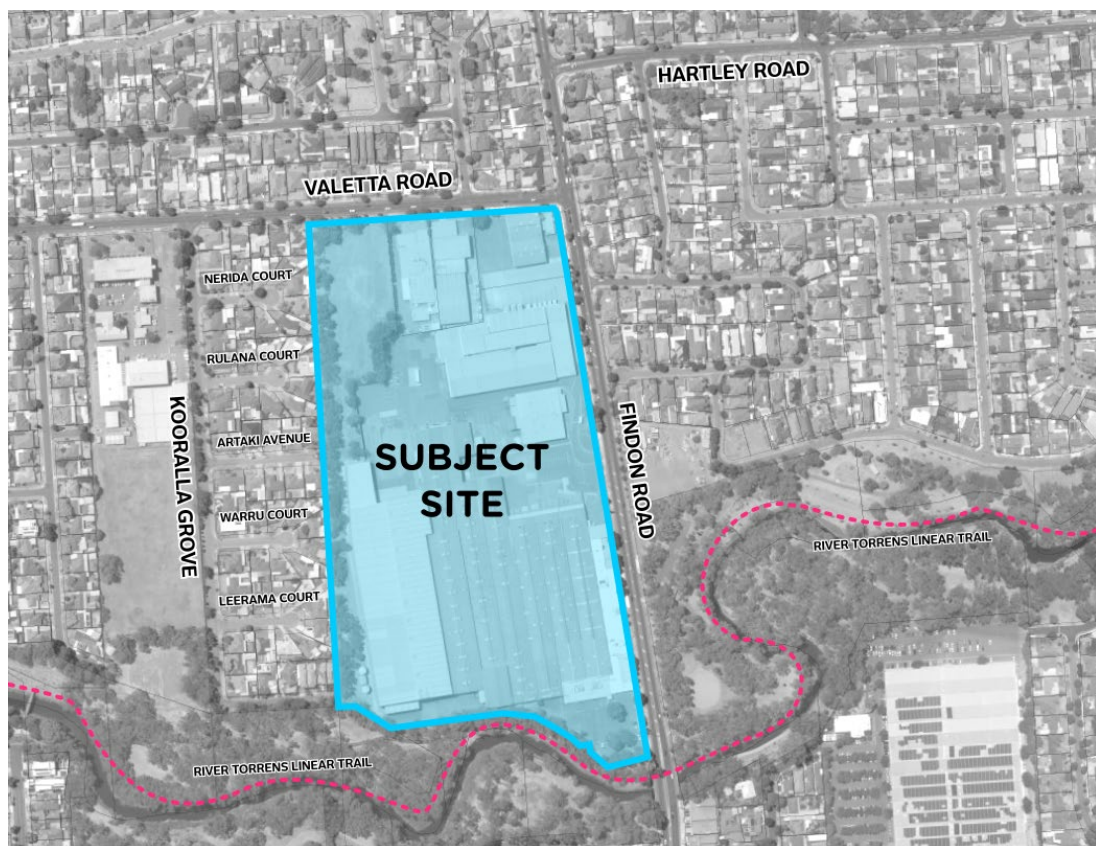


Figure 1 - The subject site and the adjacent road network

The Planning and Design Code identifies that the Affected Area is situated within a Strategic Employment Zone and that the following Overlays currently generally apply (some do not apply to the Valetta Road sites):

- Airport Building Heights (Regulated) (All structures over 15 metres);

- Advertising Near Signalised Intersections;
- Building Near Airfields;
- Hazards (Flooding);
- Hazards (Flooding General);
- Prescribed Wells Area;
- Regulated and Significant Tree;
- Traffic Generating Development;
- Urban Transport Routes; and
- Water Resources.

The Affected Area currently comprises industrial land uses (reflective of the current zoning). Notably, the majority of the Affected Area accommodated the Metcash Distribution Centre. Given the nature of the former distribution centre, there would have been a relatively high number of heavy commercial vehicle movements associated with the site (including Semi-Trailers and B-Doubles).

The (former) Metcash Distribution Centre is accessed via ten access points on Findon Road and two access points on Valetta Road. The two other parcels of land fronting Valetta Road (which are separate to the former Metcash site) are accessed via two access points on Valetta Road (one access per site).

2.2 ADJACENT ROAD NETWORK

2.2.1 KEY ADJACENT ROADS

Findon Road is an arterial road under the care and control of DIT. Adjacent the site, Findon Road generally comprises a single wide traffic lane in each direction separated by a painted median treatment. Traffic data obtained from DIT indicates that this section of Findon Road has an Annual Average Daily Traffic (AADT) volume in the order of 20,500 vehicles per day (vpd). Adjacent the site, a 60 km/h speed limit applies on Findon Road. Adjacent the Affected Area, Findon Road is gazetted for B-Double use to/from the north (the gazettal ceases at the area's southern boundary).

Valetta Road is a distributor road under the care and control of the City of Charles Sturt. Valetta Road comprises a 13.3 m (approximate) wide carriageway with a single traffic lane, a bicycle lane and a parallel parking lane in each direction. A default urban speed limit of 50 km/h applies on Valetta Road. Traffic data recorded by DIT indicates that Valetta Road currently accommodates in the order of 11,500 vpd.

Hartley Road is a collector road under the care and control of the City of Charles Sturt. Hartley Road comprises an 11.8 m (approximate) wide carriageway with a single traffic lane in each direction. A part-time bicycle lane (7:00 am to 9:00 am) and a parallel parking lane are located on the northern side of Hartley Road and a part-time bicycle lane (4:00 pm to 6:00 pm) on the southern side. A default urban speed limit of 50 km/h applies on Hartley Road. Traffic data recorded by DIT indicates that Hartley Road currently accommodates in the order of 4,700 vpd.

Other streets within the vicinity of the Affected Area are general low volume, local (residential) streets. Volumes on these roads would typically be below 1,500 vpd (and mostly well below this level). The general urban speed limit of 50 km/h applies on the surrounding local roads. It is noted that two of the adjacent roads immediately about the site (namely, Artaki Avenue and Kooralla Grove). These two roads could provide an opportunity for additional connectivity for the subject area and its surrounds (this is discussed further below).

2.2.2 KEY ADJACENT INTERSECTIONS

Based on discussions with the City of Charles Sturt and DIT, the intersections which have been considered in this assessment include:

- Findon Road and Valetta Road (signalised intersection);
- Findon Road and Hartley Road (priority-controlled Give Way intersection); and
- Grange Road and Findon Road (signalised intersection).

The signalised intersection of Findon Road and Valetta Road is located immediately adjacent the north-eastern corner of the Affected Area. At the intersection, Findon Road comprises two northbound lanes (one shared with left turns) and a single southbound and dedicated right-turn lane. Valetta Road comprises dedicated left and right-turn lanes and a single egress lane. Pedestrian movements are accommodated on all arms of the intersection. DIT has recently removed the filtered right turn provisions on the northern approach (i.e. right turns from the northern Findon Road approach into Valetta Road are only permitted when a 'green arrow' lantern is displayed). The intersection also includes dedicated cyclist lantern for movements from Valetta Road to Findon Road.

The priority-controlled (Give Way) intersection of Findon Road and Hartley Road is located 765 m south of the Grange Road/Findon Road intersection. At the intersection, Findon Road comprises a single wide traffic lane in each direction. Hartley Road comprises dedicated left and right-turn lanes and a single egress lane. Pedestrian movements across Hartley Road are accommodated by a refuge crossing.

The Grange Road and Findon Road intersection is a four-way signalised intersection. The intersection comprises dual through lanes in each direction and a high-angled left-turn lane and a dedicated right-turn lane on each approach. Pedestrian movements are accommodated within the signalised intersection.

In addition to the above intersections, it is acknowledged that the Rowells Road (continuation of Findon Road) and Pierson Street (signalised) intersection is located approximately 150 m south of the Affected Area. Based upon work previously undertaken by CIRQA for the proposed rezoning of the Westpac Mortgage Centre (which identified a reduction in volumes at the intersection due to the redevelopment of that site), it is anticipated that the Metcash redevelopment is unlikely to have significant impact on intersection (particularly given the reduction in heavy vehicles distributed to/from it as a result of redevelopment of the Affected Area). As such, a detailed assessment of this intersection has not been included.

2.3 WALKING AND CYCLING

Sealed/paved footpaths are provided on both sides of the roads bounding and adjacent the Affected Area. These service both pedestrians and cyclists. As noted above, signalised crossing arrangements for such users are provided at the intersections of Findon Road with Valetta Road and Grange Road and a refuge is provided in the vicinity of the intersection with Hartley Road. In addition, a pedestrian/cyclist refuge is provided on Findon Road near the south-eastern corner of the Affected Area.

Bicycle lanes are also provided on Valetta Road and Hartley Road. No on-road facilities are provided on Findon Road (cyclists either share the carriageway with vehicles or the footpaths with pedestrians).

These facilities provide convenient access to the surrounding network and local destinations such as nearby shopping centres (i.e. the nearby shopping centre adjacent the intersection of Grange Road and Findon Road).

The Affected Area is also located immediately north of the River Torren's Linear Park Trail. The Linear Park Trail provides a major shared (pedestrian and cyclist) path facility utilised by both commuter and recreational users. The Trail provides safe and convenient access to/from the CBD (approximately 5 km to the east) as well as various other destinations.

It is noted that there are opportunities to increase and/or improve connections from the Affected Area to the surrounding network. This includes pedestrian and cycling connections to the existing residential development to the west (i.e. Artarki Avenue and Kooralla Grove) and the River Torrens Linear Trail. These

connections would not only benefit the future residents of the Affected Area but also the existing residents to the west of the site.

2.4 PUBLIC TRANSPORT

Numerous public transport services operate within close vicinity to the Affected Area. Specifically, regular bus services operate along Findon Road, Valetta Road and Hartley Road.

Bus stops are located immediately adjacent the Affected Area on both Findon Road and Valetta Road. It is noted that buses operate at a high frequency along Valetta Road (Go Zone). Bus routes operating within immediate proximity to the Affected Area include:

- Route 110, 112 – West Lakes to City;
- Route 286, 287 – Henley Beach to City;
- Route 288 – West Lakes Centre Interchange to City;
- Route 652, – Alberton to St Michael’s College Primary Campus; and
- Route J7, J8 – West Lakes Centre Interchange to Marion Centre Interchange.

The above bus routes provide easily accessible and convenient access between the Affected Area and the Adelaide CBD as well as key retail centres (i.e. Henley Beach, Westfield West Lakes, Westfield Marion). It is also noted that the above routes provide access to other bus stops and interchanges that increases the connectivity of the Affected Area beyond the destinations listed above.

3. POTENTIAL REZONING AND FUTURE DEVELOPMENT

3.1 LAND USE AND YIELD

The Affected Area is proposed to be rezoned to accommodate mixed use development including residential and commercial opportunities. For the purposes of these investigations, it has been assumed that the Affected Area will accommodate approximately 350 dwellings within the former Metcash site and 40 dwellings on 5-7 Valetta Road (approximately 390 dwellings in total) plus an 80-place child care centre and a retail development with 1,350 m² gross leasable floor area (it is understood that the planning policy will likely restrict this to 1,000 m², nevertheless the higher area has been adopted for conservatism).

In respect to the mix of residential dwellings, the assessment has assumed the following break-down (based on preliminary concept plans):

- low density residential – 33%;
- medium density residential – 37%;
- high density residential – 30%;

3.2 ACCESS ARRANGEMENTS AND INFRASTRUCTURE

Based on initial discussions with DIT and the City of Charles Sturt, anticipated access arrangements for the Affected Area have been identified. This has included consideration of existing access provisions for the subject parcels of land, adjacent access points (such as the Dog Park access) and the initial structure plans for redevelopment of the former Metcash site.

Additionally, based on initial discussions with the City of Charles Sturt, it has been agreed that pedestrian and cyclist connections would desirably be provided to/from Artaki Avenue and Kooralla Grove. Vehicular connection to Artaki Avenue was generally not supported by the City of Charles Sturt, however, it was noted there may be some benefit to provide a vehicle connection to/from Kooralla Grove (noting the existing residents to the west would experience the primary benefit of such a connection rather than the future residents of the Affected Area). Nevertheless, for the purposes of the following traffic impact assessment it has been assumed that all movements will be via Findon Road and/or Valetta Road.

Pedestrian and cyclist connectivity should also be provided between the Affected Area and the River Torrens Trail Linear Path (south of the site) via new internal connections (ensuring treatments adequately address level differences between the site and the Linear Path). Desirably, an additional pedestrian refuge would also be provided on Findon Road in the vicinity of the existing bus stops and opposite dog park/reserve. Accessibility to and from the adjacent public

transport services (particularly the high frequency Go Zone on Valetta Road) should also be supported as part of the design of the road and path networks. This will be particularly important for the high density apartment sites. The central and northern apartment sites will be located in relatively close proximity to the Valetta Road high frequency route. However, the southern apartment sites will be just outside the typical 400 m distance adopted for bus service catchments. However, the additional distance (approximately 60 m) would equate to less than an additional minute of walking time and is also offset by the southern apartment sites' proximity to bus services on Findon Road and immediate proximity to the River Torrens Trail Linear Path. It is considered that the accessibility to/from various 'alternative' transport modes (to private motor vehicle) will appropriately support the proposed density.

Figure 2 illustrates the assumed future access arrangements for the Affected Area. Notably, while there is allowance for direct access to/from Findon Road and Valetta Road for the commercial areas, the majority of direct access points for new developments within the Affected Area will be accommodated via new internal roads. It is noted that the two existing access points (all movements permitted) for the existing commercial developments at 5 and 7 Valetta Road have been retained for the assessment).

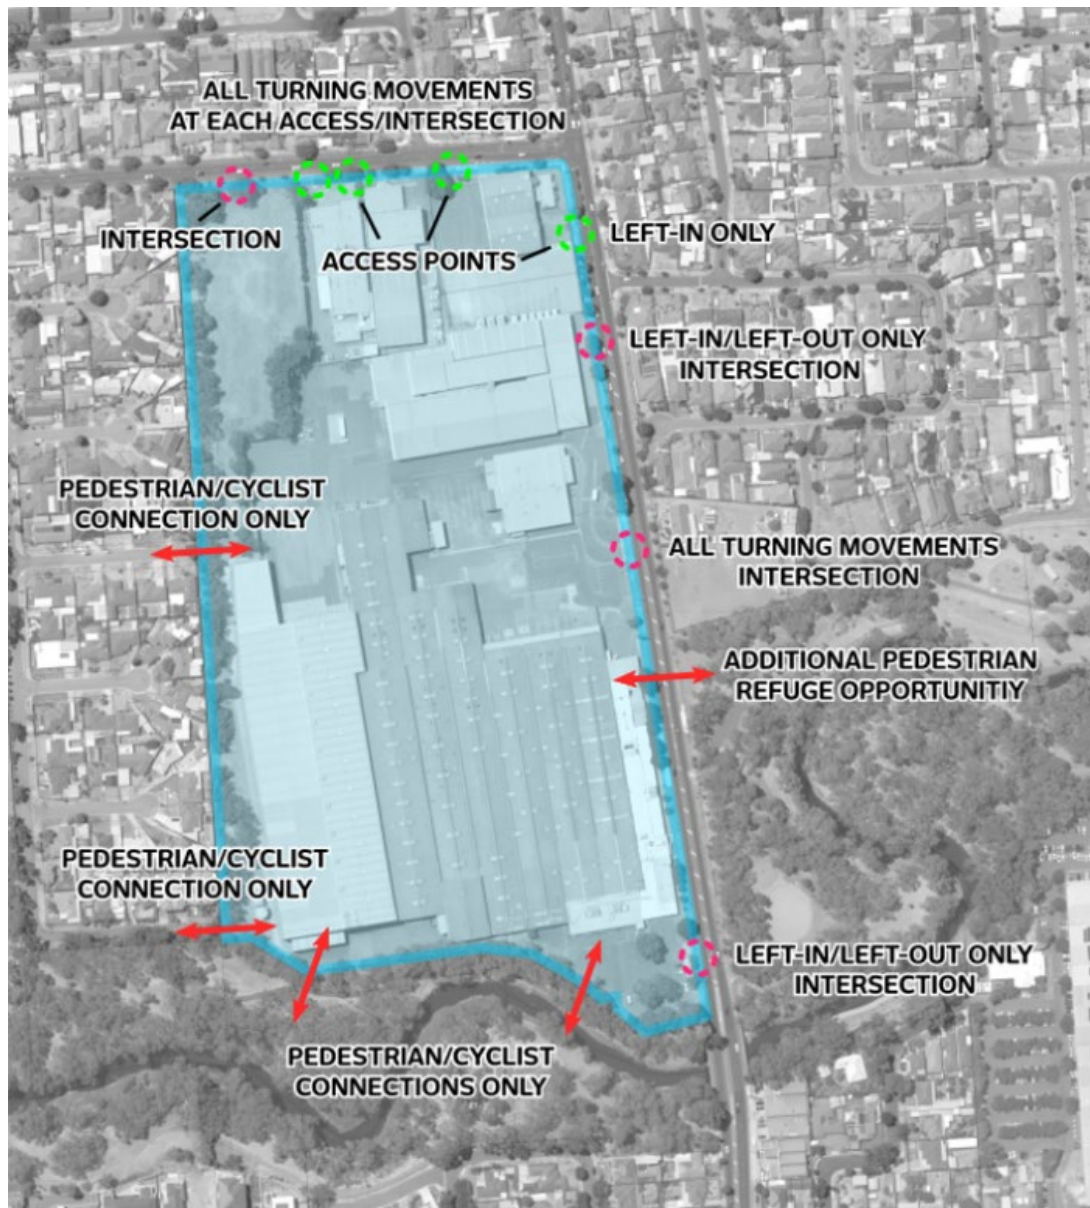


Figure 2 – Potential access arrangements for the Affected Area

The northern access points on Findon Road have been recommended to be restricted to left-in and/or left-out movements only to minimise impacts and conflict potential associated with the adjacent intersections of Findon Road with Beltana Street and Valetta Road. The southern access point has also been identified as left-in/left-out (given its proximity to the bridge over the River Torrens restricts available cross section for a right turn lane on Findon Road). If the southern access was located further north, there may be potential for right-in and/or right-out movements to be accommodated.

In order to service the future development of the Affected Area, an internal road network will also be required. The internal road network should provide connectivity between the various intersections. However, the internal road

network design should include appropriate road alignment and, if necessary traffic control devices to reduce vehicle speeds and the attractiveness of these connections for non-local drivers to cut-through between Findon Road and Valetta Road.

The internal road network should be designed in accordance with the City of Charles Sturt's engineering guidelines. In particular, the design of the road network should include consideration of on-street parking provisions, pedestrian and cyclist connectivity, waste collection provisions and appropriate traffic management treatments at all new intersections.

The primary intersection on Findon Road should be treated with a separate right-turn lane. Similarly, traffic volumes on Valetta Road would also warrant a separated right turn lane for the new Valetta Road intersection (albeit this should be discussed further with Council as this would apply to other existing side streets but no such facility is provided and Council may prefer a consistent treatment along Valetta Road).

Additionally, intersection treatments should also seek to improve pedestrian and cyclist safety and connectivity for the associated roads.

4. TRAFFIC GENERATION AND DISTRIBUTION

In order to determine the impacts of the proposed rezoning on the adjacent road network, traffic volumes associated with the existing and potential future site (based upon the above yields) have been forecast.

Traffic volumes have generally been forecast using rates adopted from the NSW Roads and Maritime Services' *"Guide to Traffic Generating Developments"* (the RMS Guide) or other rates considered appropriate based on CIRQA's experience. The proportion of heavy vehicle movements assumed for each use has also been identified.

- **Low density residential**
 - 0.71 am and 0.78 pm peak hour trips per dwelling;
 - 2% of peak hour trips assumed to be commercial vehicles;
 - 70%/30% split of trips to/from the site during the am peak hour and vice versa during the pm peak hour;
- **Medium density residential**
 - 0.65 am and pm peak hour trips per dwelling;
 - 2% of peak hour trips assumed to be commercial vehicles;
 - 70%/30% split of trips to/from the site during the am peak hour and vice versa during the pm peak hour;
- **High density residential**
 - 0.65 am and pm peak hour trips per dwelling;
 - 2% of peak hour trips assumed to be commercial vehicles;
 - 70%/30% split of trips to/from the site during the am peak hour and vice versa during the pm peak hour;
- **Child Care Centre**
 - 0.48 am and 0.42 pm peak hour trips per child;
 - 2% of peak hour trips assumed to be commercial vehicles;
 - 50%/50% split of trips to/from the site during the am and pm peak hours;
- **Retail/shop**
 - 4.5 am / 9 pm trips per 100 m² gross leasable floor area (this is likely to be a conservative assessment as the size of the retail area would likely be associated with lower generating types of shops than high volume shopping centres);
 - 2% of trips assumed to be commercial vehicles;
 - 50%/50% split of trips to/from the site during the am and pm peak hours;
- **Industry (Business parks and industrial estates)**

- 0.52 am and 0.56 pm peak hour trips per 100 m² of gross floor area;
- 5% of peak hour trips assumed to be commercial vehicles;
- 60%/40% split of trips to/from the site during the am peak hour and vice versa during the pm peak hour;
- **Metcash Distribution Centre**
 - a peak hour trip rate 0.343 am and pm trips per 100 m² of gross leasable floor area was adopted. This rate was based off data obtained from the Woolworths distribution centre in Gepps Cross (with the existing Metcash site anticipated to generate traffic in a similar manner);
 - a peak hour commercial vehicle percentage of 40% am and 25% pm was adopted based on the Woolworths distribution centre in Gepps Cross;
 - 60%/40% split of trips to/from the site during the am peak hour and vice versa during the pm peak hour;

Traffic volumes have been distributed to various intersections surrounding the subject site in order to determine the rezoning's potential impact. Intersections which have been considered in this assessment include:

- Findon Road and Valetta Road (signalised intersection);
- Findon Road and Hartley Road (Give Way intersection); and
- Findon Road and Grange Road (signalised intersection).

4.1 EXISTING MOVEMENTS

The distribution centre and industry traffic generation rates have been applied to the existing properties within the Affected Area. It is estimated that the uses (when fully operational) generated in the order of 243 am and 246 pm peak hour trips (refer Appendix A). This includes 85 am and 54 pm commercial vehicle trips.

The resulting distribution of am and pm peak hour trips forecast for the existing (previous) uses is provided in Appendix A.

4.2 FORECAST MOVEMENTS

Based upon the proposed land uses and the above traffic generation rates, it is forecast that the proposed rezoning and resulting development of the Affected Area will generate in the order of 295 am and 333 pm peak hour trips on the access points and external road network. The rezoning and redevelopment of the Affected Area is therefore forecast to result in additional movements being distributed to the surrounding road network. However, the number and size of commercial vehicle movements would reduce (notably, B-Doubles would no longer be required to access the site nor the adjacent section of Findon Road). Furthermore, the assumption around the extent of retail is understood to be

conservative and the above forecast future volumes would be reduced if the floor area was restricted to 1,000 m² or less. Nevertheless, the adoption of the higher yield provides a conservative assessment.

The distribution of future trips associated with the site has been estimated using demographic data from the 2016 ABS Census and consideration of the local road network. This included demographic data for the City of Charles Sturt in relation to the location of residents' places of work and residential origins of workers within the vicinity of the subject site. Consideration has also been given to the potential for drivers associated with the redevelopment of the Affected Area to utilise Beltana Road and Gerard Road (to avoid delays at the intersections of Findon Road with Valetta Road and Hartley Road). The distribution assumptions are also consistent with those adopted for the previous Development Plan Amendments and Findon Road Intersection Study. Figure 3 illustrates the broad distribution adopted for previous and current assessments.

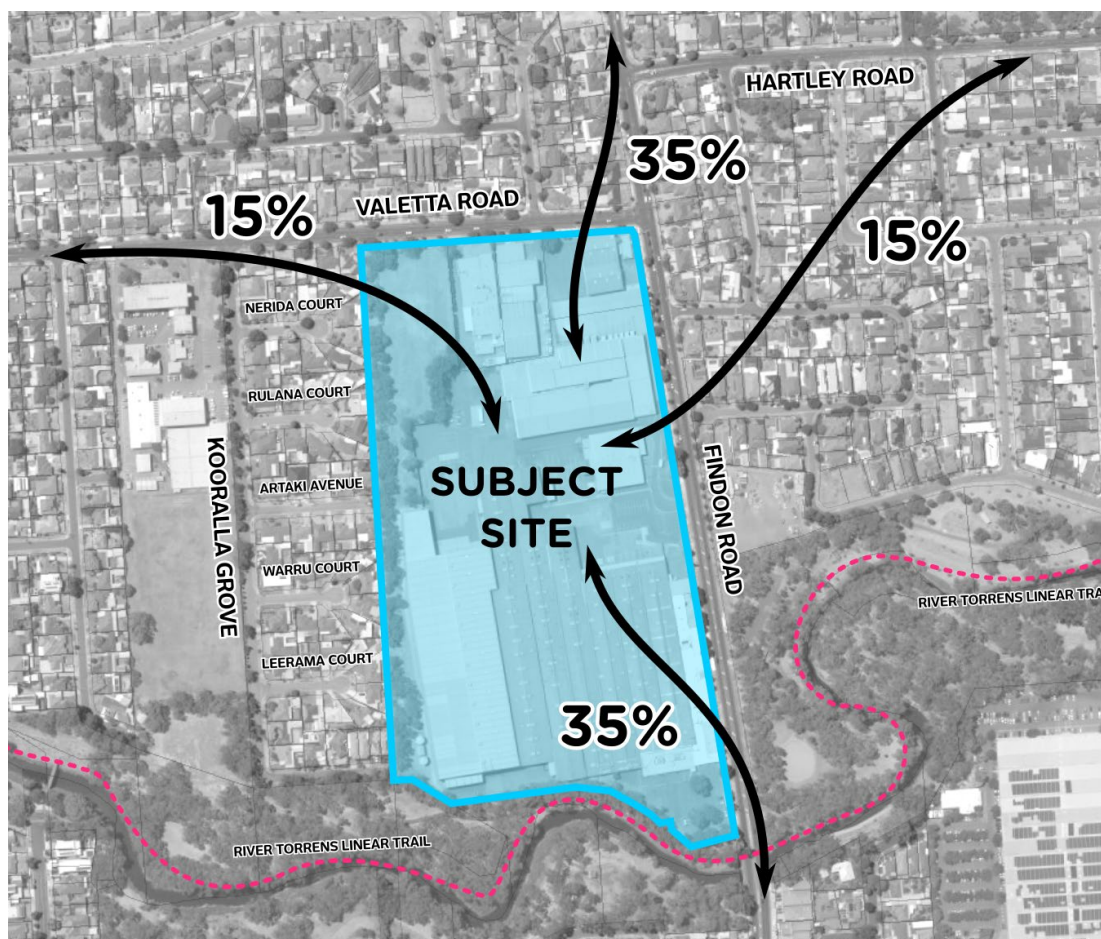


Figure 3 - Broad distribution of future traffic movements adopted for the assessment

The resulting traffic distribution and vehicle movements are identified in Appendix B.

4.3 KIDMAN PARK NORTH DPA & THE ALDI DEVELOPMENT

In addition to the volumes forecast for the Affected Area, the assessment has also included consideration of volumes previously forecast for the nearby Kidman Park North Development Plan Amendment and the ALDI Development Plan Amendment sites. These forecasts have been detailed in previous assessments prepared by CIRQA (and previously provided to both the City of Charles Sturt and DIT). The previous assessments identified the following peak hour volumes associated with the existing/previous uses for these sites and future forecasts based on the assumed development yields:

- **Kidman Park North Site**
 - a reduction of 2 am peak hour trips and an increase of 47 pm peak hour trips (notably, the number of commercial vehicles – including B-Doubles – was forecast to be significantly reduced as a result of redevelopment of the site); and
- **ALDI Site**
 - an addition of 273 am and pm peak hour movements (albeit a proportion of the additional movements would not be distributed via the section of Findon Road within the study area for the Metcash Code Amendment).

5. TRAFFIC IMPACT

SIDRA Intersection modelling software (version 9) has been used to assess the impacts of the proposed rezoning and anticipated development on the adjacent road network.

As per discussions with City of Charles Sturt and DIT, SIDRA analysis has been undertaken for the following intersections (as is consistent with previous investigations in the subject area):

- Findon Road/ Valetta Road;
- Findon Road/ Hartley Road; and
- Grange Road/ Findon Road.

It should be noted that all SIDRA Intersection modelling has included consideration of DIT's SIDRA Modelling Guidelines. It is noted that due to the close proximity of the Valetta Road/Findon Road and Hartley Road/Findon Road intersections, network modelling has been undertaken for these two intersections (network modelling combines the individual intersection models into a connected 'network' to allow consideration of interactions between the adjacent intersections).

To assess the impact of the subject rezoning, two scenarios were modelled (noting that analysis of existing volumes has been undertaken for the previous assessments):

- **Base Scenario**

Existing traffic volumes were grown by 0.71% per annum (growth rate based on historical data) to the 2036 design year (as was adopted for the previous assessment for key intersections on Findon Road). Additional movements previously forecast for the Kidman Park North DPA (forecast future movements minus existing movements) and the ALDI DPA were added to the 2036 design volumes, producing the Base Scenario of which the impact of the subject rezoning could be assessed against.

- **Future Scenario**

Additional movements generated by the subject rezoning (forecast redevelopment volumes minus the existing volumes for the Affected Area) are added to the Base Scenario volumes.

Detailed SIDRA output is included in Appendices C to E with key results and outcomes identified below.

5.1 VALETTA ROAD/FINDON ROAD INTERSECTION

Initial modelling of the Valetta Road/Findon Road intersection has indicated that the intersection would be over capacity by 2036 (regardless of the proposed rezoning and redevelopment of the site). The additional traffic volumes associated with the Future Scenario result in a worsening of conditions at the intersection (albeit it is reiterated that the number of commercial vehicle movements will be reduced). The analysis has therefore been utilised to identify the extent of upgrade required at the intersection to retain similar conditions (if not better) to the Base Scenario.

The analysis indicates that the following upgrade would essentially retain the status quo:

- construction of a high-angle entry left turn lane from Findon Road (south) to Valetta Road;
- designation of the kerb-side lane on Valetta Road as a shared left and right turn lane (with associated geometric adjustments to the intersection to accommodate the required vehicle turns); and
- extension of the section of dual lane approaches on Findon Road (south) and Valetta Road.

The key SIDRA results for the Base and Future Scenarios are identified in Table 1 below. The Future Scenario results reflect those associated with the above upgrade.

Table 1 - Key am and (pm) peak hour results for Valetta Road/Findon Road

Approach	Movement	Base Scenario			Future Scenario		
		Volume	Degree of Saturation (v/c)	Level of Service	Volume	Degree of Saturation (v/c)	Level of Service
Findon Road (South)	L	200 (357)	0.542 (0.512)	C (B)	201 (356)	0.400 (0.369)	B (A)
	T	864 (795)	1.723 (1.581)	F (F)	876 (747)	1.272 (1.173)	F (F)
Findon Road (North)	T	889 (1,017)	0.952 (0.732)	D (A)	837 (1,013)	0.722 (0.719)	B (A)
	R	284 (419)	1.457 (0.927)	F (D)	296 (456)	1.187 (1.214)	F (F)
Valetta Road (West)	L	565 (276)	0.916 (0.323)	D (B)	582 (292)	0.921 (0.409)	D (B)
	R	401 (175)	1.017 (0.677)	F (C)	416 (195)	1.309 (0.966)	F (E)
Total		3,293 (3,039)	1.723 (1.581)		3,208 (3,059)	1.309 (1.214)	

The results confirm that the above upgrade would be sufficient to retain similar conditions (and generally better conditions) for the Future Scenario compared to the Base Scenario.

The modelling has indicated that an upgrade of the intersection would be desirable to improve capacity regardless of the rezoning and redevelopment of the Affected Area. However, the modelling indicates that, if the Affected Area were to be rezoned (and redeveloped) as proposed, a high angled left-turn lane on the southern approach of Findon Road and dual right-out movements from Valetta Road (northern lane becomes a shared left and right turn lane) would offset the impact of the proposal. The analysis indicates extension of the dual lanes on the southern approach of Findon Road would also assist (albeit in reality drivers already form two 'lanes' by this point). Figure 4 identifies the upgrade layout identified from the SIDRA modelling. It should be noted that this layout is a concept sketch only and further design interrogation (as well as relevant approvals) would be required to confirm the alignment (particularly any geometric adjustments to accommodate the dual right-out of Valetta Road). The upgrade should also consider opportunities to reinforce and improve Council's cycling route between Valetta Road and Hartley Road (via Findon Road).

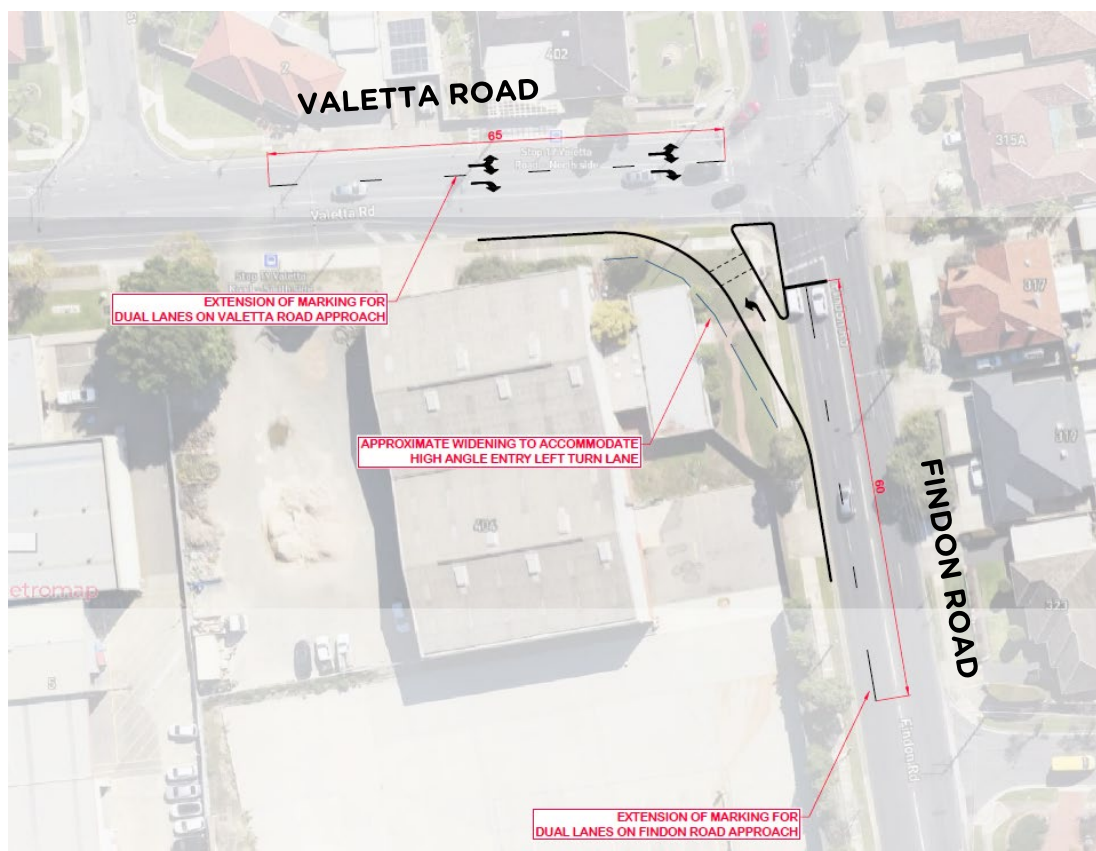


Figure 4 – Potential upgrade to address additional volumes associated with the rezoning/redevelopment (subject to detailed design and relevant approvals)

It is also noted that reinstatement of the filtered right turn movement from Findon Road (north) to Valetta Road would provide improved capacity at the intersection (albeit, if considered for reinstatement, would require review of the appropriateness from a safety perspective as well).

5.2 FINDON ROAD/HARTLEY ROAD INTERSECTION

The key SIDRA results for the Base and Future Scenarios are identified in Table 2 below (assuming no upgrade to the intersection).

Table 2 - Key am and (pm) peak hour results for Findon Road/ Hartley Road

Approach	Movement	Base Scenario			Future Scenario		
		Volume	Degree of Saturation (v/c)	Level of Service	Volume	Degree of Saturation (v/c)	Level of Service
Findon Road (South)	T	1,149 (936)	1.006 (0.377)	C (A)	1,164 (900)	0.566 (0.443)	A (A)
	R	280 (134)	0.924 (0.634)	F (E)	294 (138)	0.881 (0.815)	E (F)
Hartley Road (East)	L	234 (222)	1.179 (1.610)	F (F)	236 (237)	1.022 (2.561)	F (F)
	R	10 (56)	0.570 (2.429)	F (F)	10 (56)	0.549 (3.226)	F (F)
Findon Road (North)	L	183 (61)	0.631 (0.942)	A (B)	183 (61)	0.591 (0.694)	A (A)
	T	938 (1,213)	0.631 (0.942)	A (A)	896 (1,232)	0.591 (0.694)	A (A)
Total		2,794 (2,622)			2,783 (2,624)		

As has previously been identified, the intersection of Findon Road/Hartley Road is already at capacity. Additional background growth in traffic volumes will continue to increase delays and queues at the intersection (particularly for movements out of Hartley Road). However, the forecast volumes associated with the Future Scenario indicate a reduction in the number of movements distributed to/from the intersection in the am peak hour (11 less trips) and a negligible increase (2 peak hour trips) in the pm peak hour. The proposed rezoning and anticipated redevelopment of the Affected Area would therefore provide a slight benefit in the traffic volumes distributed via the intersection. It is noted that there are relatively high increases in the Degrees of Saturation for movements out of Hartley Road in the pm peak. However, these results are primarily due to the intersection already being at or over capacity and that SIDRA typically generates exponentially increasing results once an intersection is already saturated. In reality, the change in traffic volumes forecast for the intersection (between the two scenarios) are very low and would be within typical daily fluctuations in volumes resulting in negligible difference in actual conditions between the two scenarios. While there may ultimately be a desire to improve capacity by upgrading the intersection, this would be associated existing volumes and other background traffic growth rather than the subject proposal.

5.3 FINDON ROAD/GRANGE ROAD INTERSECTION

The key SIDRA results for the Base and Future Scenarios for Findon Road/Grange Road are identified in Table 2, below. As identified as part of the previous assessments undertaken within the subject area, the intersection of Findon Road/Grange Road will be over capacity by 2036.

Table 3 - Key am and (pm) peak hour results for Findon Road/Grange Road

Approach	Movement	Base Scenario			Future Scenario		
		Volume am (pm)	Degree of Saturation (v/c)	Level of Service	Volume am (pm)	Degree of Saturation (v/c)	Level of Service
Findon Road (South)	L	182 (288)	0.453 (0.438)	D (D)	184 (282)	0.444 (0.411)	C (C)
	T	548 (509)	1.528 (1.478)	F (F)	543 (475)	1.497 (1.387)	F (F)
	R	326 (203)	1.175 (0.746)	F (E)	344 (206)	1.226 (0.752)	F (E)
Grange Road (East)	L	184 (285)	0.842 (1.300)	E (F)	184 (305)	0.820 (1.315)	E (F)
	T	543 (980)	0.842 (1.300)	D (F)	543 (980)	0.820 (1.315)	D (F)
	R	173 (314)	0.630 (0.934)	D (D)	173 (314)	0.643 (0.937)	D (D)
Findon Road (North)	L	139 (122)	0.571 (0.663)	D (E)	139 (122)	0.528 (0.656)	D (E)
	T	550 (679)	1.417 (1.644)	F (F)	513 (674)	1.310 (1.628)	F (F)
	R	257 (332)	0.941 (1.319)	E (F)	257 (332)	0.930 (1.318)	E (F)
Grange Road (West)	L	270 (191)	1.237 (0.873)	F (E)	270 (191)	1.237 (0.879)	F (E)
	T	978 (676)	1.237 (0.873)	F (D)	978 (676)	1.237 (0.879)	F (D)
	R	324 (305)	0.976 (0.976)	D (E)	318 (307)	0.935 (0.984)	D (E)
Total		4,483 (4,484)	1.528 (1.644)		4,446 (4,864)	1.497 (1.628)	

The analysis indicates that the rezoning and redevelopment of the Affected Area would slightly improve conditions at the intersection. Notably, all movements at the intersection either have a retained or improved Level of Service between the Base Scenario and the Future Scenario. The proposed rezoning and subsequent redevelopment would therefore provide a positive outcome for the intersection of Findon Road/Grange Road (due to reduced commercial vehicle numbers as well as the redistribution of movements associated with the Affected Area). It is also noted that the intersection performs worse in the am peak hour (than the pm peak hour) when the forecast change in volumes is negligible.

5.4 ACCESS POINTS

Based on the forecast future traffic volumes, SIDRA analysis has also been prepared to consider access provisions for the site. Specifically, this has been prepared for the primary (all movement) access point on Findon Road (given all other intersections will be associated with a lower traffic volumes and, in some cases, less turning movements permitted (i.e. the primary access point

represents the 'worst case' for conditions associated with any of the site access points).

The SIDRA analysis has been prepared based on a 'two-stage' right turn out arrangement with a separated right turn lane (essentially retaining the existing arrangement). The detailed SIDRA results are provided in Appendix F. The results identify that the volumes forecast for the primary access point will be adequately accommodated with the following key conditions:

- all through bound movements on Findon Road will have a Level of Service of 'A';
- turning movements will have a worst-case Level of Service of 'D' (for the right-out during the pm peak hour with other movements either having a Level of Service of 'A' (for left-in movements) or 'C' (for left-out and right-in movements);
- the movements at the intersection will have a Degree of Saturation of 0.718 or better (lower); and
- the 95th percentile queues for vehicles turning right from Findon Road into the new road will be one vehicle (rounded) in both the am and pm peak hour; and
- the 95th percentile queues for vehicles turning right out of the new road on to Findon Road will be two vehicles (one in the median opening and one on the new road itself).

It is recommended that the detailed design of the new intersection ensure that two-stage movements for the right turn out are adequately accommodated (i.e. reasonable median storage for a B99 car with additional clearances and associated turn path assessment).

5.5 VALETTA ROAD

It is forecast that the redevelopment of the Affected Area would be associated with approximately 450 daily traffic movements on Valetta Road to/from the west of the site. Such an increase would have minimal impact on conditions associated with Valetta Road. Furthermore, this forecast doesn't take into account the previous distribution of traffic associated with the Metcash site and the actual increase would be lower.

5.6 INTERNAL LAYOUT

Based on the forecast traffic volumes, the daily traffic volumes on the internal roads will be within the typical range associated with 'local roads' (0 to 1,500 vehicles per day). Specifically, the new road connecting to the primary (central) access point on Findon Road is forecast to accommodate a future volume of

1,000 vpd with other roads connecting to Findon Road and Valetta Road forecast to accommodate in the order of 250 to 500 vpd. These volumes will be somewhat dependent on the ultimate access arrangements achieved and the internal road layout, however, the assessment provides an indicator that the internal road network will generally accommodate relatively low volumes.

It has been noted above that the internal road network should be designed to discourage cut-through movements between Findon Road and Valetta Road. There are two primary potential cut-through routes associated with the site, namely (a) drivers avoiding a left turn from Findon Road to Valetta Road at the signalised intersection and (b) drivers approaching Findon Road from Valetta Road (either seeking to turn right on to Findon Road and head south or seeking to access Hartley Road). The identified upgrade to the Findon Road/Valetta Road intersection will assist in minimising the attractiveness of drivers seeking to avoid the left turn from Findon Road and the right turn from Valetta Road to Findon Road and this could be further strengthened through appropriate road design within the site. In respect to drivers from Valetta Road avoiding the signalised intersection by travelling through the site and then to Hartley Road via Beltana Street and Gerard Road, significant use of this cut-through route is considered unlikely. To undertake such a route would comprise almost twice the travel distance and twice the number of non-priority turns. As above, this can be explored further during detailed design to ensure the road alignments and treatments minimise this potential. It is noted, however, that given the central connection between Findon Road and Valetta Road would have additional capacity, there may be some benefit to accepting a proportion of cut-through movements to reduce traffic loads at the signalised intersection of Findon Road/Valetta Road (albeit there may be associated impacts on residents within the future development if such provisions are overly attractive to non-local drivers). This could be reviewed further as planning and design for the internal site layout progresses.

5.7 OTHER EXTERNAL CONSIDERATIONS

In addition to the potential for cut-through movements through the site, it has also been noted that there will likely be a proportion of movements associated with the site that are distributed via Beltana Street and Gerard Road. This has been considered in the above modelling and it is considered that the potential distribution of movements to these roads would result in daily traffic volumes still within their respective capacities (noting that the current volumes on these roads are in the order of 570 vpd for Beltana Road and 430 vpd for Gerard Road). Notably, even if all movements distributed to Hartley Road from the development of the Affected Area utilised Beltana Road and Gerard Road, the increase would only be in the order of 150 vpd and total volumes would remain well within the typical level associated with local roads. In reality, the distributed to these roads would be less than this. Furthermore, the assessment does not consider the

potential for previous Metcash staff (from the site's southern car park) to utilise such a cut-through and, therefore, the increase would be even less.

Similarly, if a direct vehicle connection is provided between the Affected Area and the south-eastern end of Kooralla Grove, there may be potential for cut-through movements. However, this would primarily be associated with existing residents of Kooralla Grove and the five small side streets to its east and the number of movements would be relatively low. There would be some benefit to these residents if the connection was made to provide improved permeability of the road network, however, further consideration would be needed to ensure the connection doesn't encourage movements from the southern left-in on Findon Road to Valetta Road (to bypass the signals). This could be considered further if such a vehicle connection is proposed and the internal road layout of the Affected Area designed accordingly.

APPENDIX A

FORECAST MOVEMENTS – BASE SCENARIO EXISTING (PREVIOUS) USES

TS048 Grange Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	138.88
		3	T	549.84
		4	R	256.05
	2	3	L	183.32
		4	T	542.40
		1	R	172.03
	3	4	L	181.61
		1	T	547.98
		2	R	325.20
	4	1	L	269.77
		2	T	977.92
		3	R	323.64

TS048 Grange Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	121.16
		3	T	678.43
		4	R	331.50
	2	3	L	284.33
		4	T	979.48
		1	R	313.20
	3	4	L	287.77
		1	T	508.40
		2	R	202.89
	4	1	L	190.90
		2	T	675.42
		3	R	304.77

Hartley Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	182.89
		3	T	937.84
	2	3	L	233.69
		1	R	9.63
	3	1	T	1148.65
		2	R	279.73

Hartley Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	60.52
		3	T	1212.94
	2	3	L	221.03
		1	R	55.65
	3	1	T	935.97
		2	R	133.54

TS338 Valetta Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	199.15
		3	T	863.40
	2	3	L	564.98
		1	R	400.61
	3	1	T	888.50
		2	R	283.04

TS338 Valetta Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	356.86
		3	T	794.98
	2	3	L	275.53
		1	R	174.98
	3	1	T	1016.94
		2	R	418.03

Valetta Rd Access 1 (West)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	482.19
	2	3	L	0.00
		1	R	0.00
	3	1	T	965.59
		2	R	0.00

Valetta Rd Access 1 (West)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	774.89
	2	3	L	0.00
		1	R	0.00
	3	1	T	450.50
		2	R	0.00

Valetta Rd Access 2 (Middle)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	482.19
	2	3	L	0.00
		1	R	0.00
	3	1	T	965.59
		2	R	0.00

Valetta Rd Access 2 (Middle)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	774.89
	2	3	L	0.00
		1	R	0.00
	3	1	T	450.50
		2	R	0.00

Valetta Rd Access 3 (East)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	482.19
	2	3	L	0.00

Valetta Rd Access 3 (East)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0.00
		3	T	774.89
	2	3	L	0.00

	←	1	R	0.00
	3	1	T	965.59
		2	R	0.00

	←	1	R	0.00
	3	1	T	450.50
		2	R	0.00

Findon Rd Access 1 (Commercial)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1289.10
		3	R	0.00
	2	3	L	0.00
		1	T	1062.56
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 1 (Commercial)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1191.92
		3	R	0.00
	2	3	L	0.00
		1	T	1151.85
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 1 (North)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1289.10
		3	R	0.00
	2	3	L	0.00
		1	T	1062.56
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 1 (North)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1191.92
		3	R	0.00
	2	3	L	0.00
		1	T	1151.85
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 2 (Centre)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1289.10
		3	R	0.00
	2	3	L	0.00
		1	T	1062.56
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 2 (Centre)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1191.92
		3	R	0.00
	2	3	L	0.00
		1	T	1151.85
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 3 (South)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1289.10
		3	R	0.00
	2	3	L	0.00
		1	T	1062.56
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 3 (South)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1191.92
		3	R	0.00
	2	3	L	0.00
		1	T	1151.85
	3	1	L	0.00
		2	R	0.00

Beltana St/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0
		3	T	1289.10
	2	3	L	0.00
		1	R	0.00
	3	1	T	1062.56
		2	R	0.00

Beltana St/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	0
		3	T	1191.92
	2	3	L	0.00
		1	R	0.00
	3	1	T	1151.85
		2	R	0.00

APPENDIX B

FORECAST MOVEMENTS – FUTURE SCENARIO

FUTURE USES

TS048 Grange Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	138.88
		3	T	512.87
		4	R	256.05
	2	3	L	183.35
		4	T	542.40
		1	R	172.03
	3	4	L	183.04
		1	T	542.27
		2	R	343.49
	4	1	L	269.77
		2	T	977.92
		3	R	317.65

TS048 Grange Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	121.16
		3	T	673.75
		4	R	331.50
	2	3	L	304.66
		4	T	979.48
		1	R	313.20
	3	4	L	281.73
		1	T	474.28
		2	R	205.77
	4	1	L	190.90
		2	T	675.42
		3	R	306.88

Hartley Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	182.89
		3	T	895.91
	2	3	L	235.71
		1	R	9.63
	3	1	T	1163.66
		2	R	293.59

Hartley Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	60.52
		3	T	1231.69
	2	3	L	236.24
		1	R	55.65
	3	1	T	899.69
		2	R	137.46

TS338 Valetta Rd/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	200.17
		3	T	875.21
	2	3	L	581.04
		1	R	415.34
	3	1	T	836.21
		2	R	295.41

TS338 Valetta Rd/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	355.58
		3	T	746.74
	2	3	L	291.41
		1	R	194.12
	3	1	T	1012.57
		2	R	455.36

Valetta Rd Access 1 (West)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	11.58
		3	T	497.37
	2	3	L	13.11
		1	R	18.50
	3	1	T	973.28
		2	R	7.34

Valetta Rd Access 1 (West)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	22.41
		3	T	787.36
	2	3	L	5.41
		1	R	7.44
	3	1	T	466.73
		2	R	14.10

Valetta Rd Access 2 (Middle)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	3.98
		3	T	507.31
	2	3	L	1.64
		1	R	9.29
	3	1	T	991.08
		2	R	0.70

Valetta Rd Access 2 (Middle)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	9.29
		3	T	809.06
	2	3	L	0.70
		1	R	3.98
	3	1	T	472.52
		2	R	1.64

Valetta Rd Access 3 (East)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	10.94
		3	T	507.65
	2	3	L	3.65
		1	R	20.66

Valetta Rd Access 3 (East)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	21.87
		3	T	811.07
	2	3	L	7.29
		1	R	41.31

	3	1	T	996.72
		2	R	3.65

	3	1	T	469.22
		2	R	7.29

Findon Rd Access 1 (Commercial)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1340.55
		3	R	0.00
	2	3	L	9.72
		1	T	1138.38
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 1 (Commercial)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1271.69
		3	R	0.00
	2	3	L	19.44
		1	T	1192.32
	3	1	L	0.00
		2	R	0.00

Findon Rd Access 2 (North)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1340.68
		3	R	0.00
	2	3	L	7.55
		1	T	1113.82
	3	1	L	38.83
		2	R	0.00

Findon Rd Access 2 (North)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1274.03
		3	R	0.00
	2	3	L	12.05
		1	T	1191.67
	3	1	L	18.28
		2	R	0.00

Findon Rd Access 3 (Centre)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1311.93
		3	R	28.75
	2	3	L	6.65
		1	T	1094.85
	3	1	L	26.52
		2	R	43.18

Findon Rd Access 3 (Centre)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1214.78
		3	R	59.25
	2	3	L	14.52
		1	T	1193.06
	3	1	L	10.66
		2	R	18.86

Findon Rd Access 4 (South)				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1355.11
		3	R	0.00
	2	3	L	9.34
		1	T	1088.29
	3	1	L	13.22
		2	R	0.00

Findon Rd Access 4 (South)				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	T	1233.64
		3	R	0.00
	2	3	L	20.28
		1	T	1202.32
	3	1	L	5.27
		2	R	0.00

Beltana St/ Findon Rd				
AM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	2.56243
		3	T	1337.99
	2	3	L	2.69
		1	R	2.32
	3	1	T	1145.78
		2	R	6.87

Beltana St/ Findon Rd				
PM	Arm	Exit Arm	Movement	Total Veh
	1	2	L	2.986995
		3	T	1268.70
	2	3	L	5.33
		1	R	4.78
	3	1	T	1206.98
		2	R	2.97

APPENDIX C

FINDON ROAD/VALETTA ROAD SIDRA RESULTS

APPENDIX C1

BASE SCENARIO

MOVEMENT SUMMARY

 Site: TS338 [Valetta/Findon AM Base Scenario (Site Folder: Valetta/Findon)]

 Network: N101 [AM Base Scenario (Network Folder: General)]

Valetta/Findon

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 60 seconds (Site User-Given Phase Times)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %				[Veh. veh	Dist] m				
South: Findon Rd (S)														
1	L2	211	2.0	211	2.0	0.542	21.8	LOS C	5.1	36.6	0.83	0.77	0.83	41.9
2	T1	909	4.1	909	4.1	* 1.723	574.0	LOS F	97.2	703.8	0.97	3.84	6.42	3.0
Approach		1120	3.7	1120	3.7	1.723	470.2	LOS F	97.2	703.8	0.95	3.26	5.37	4.3
North: Findon Rd (N)														
8	T1	936	3.0	930	3.0	0.952	42.8	LOS D	13.9	100.0	0.90	1.24	1.46	28.7
9	R2	299	4.9	297	4.9	* 1.457	446.6	LOS F	13.7	100.0	1.00	2.81	6.05	4.4
Approach		1235	3.5	1227 ^N ₁	3.5	1.457	140.6	LOS F	13.9	100.0	0.92	1.62	2.57	12.3
West: Valetta Rd (W)														
10	L2	595	2.5	595	2.5	0.916	40.7	LOS D	13.5	96.3	0.86	1.07	1.36	24.5
12	R2	422	0.0	422	0.0	* 1.017	82.4	LOS F	14.8	103.7	1.00	1.44	2.28	24.0
Approach		1017	1.4	1017	1.4	1.017	58.0	LOS E	14.8	103.7	0.92	1.22	1.74	24.2
All Vehicles		3372	2.9	3364 ^N ₁	2.9	1.723	225.4	LOS F	97.2	703.8	0.93	2.05	3.25	8.6

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

Pedestrian Movement Performance											
Mov ID	Crossing	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	sec		[Ped ped	Dist] m			sec	m	m/sec
South: Findon Rd (S)											
P1	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	50.7	34.3	0.68
North: Findon Rd (N)											
P3	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	51.5	35.3	0.69
West: Valetta Rd (W)											
P4	Full	53	18.4	LOS B	0.1	0.1	0.79	0.79	43.6	32.7	0.75
All Pedestrians		158	22.4	LOS C	0.1	0.1	0.86	0.86	48.6	34.1	0.70

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

MOVEMENT SUMMARY

Site: TS338 [Valetta/Findon PM Base Scenario (Site Folder: Valetta/Findon)]

Network: N101 [PM Base Scenario (Network Folder: General)]

Valetta/Findon

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 60 seconds (Site User-Given Phase Times)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
1	L2	376	0.6	376	0.6	0.512	12.1	LOS B	3.4	24.1	0.54	0.73	0.54	45.8
2	T1	837	0.9	837	0.9	* 1.581	553.5	LOS F	95.7	675.1	1.00	4.22	6.74	3.1
Approach		1213	0.8	1213	0.8	1.581	385.7	LOS F	95.7	675.1	0.86	3.14	4.82	5.6
North: Findon Rd (N)														
8	T1	1071	1.2	1008	1.1	0.732	7.1	LOS A	11.2	78.8	0.67	0.61	0.67	51.6
9	R2	441	1.4	415	1.4	* 0.927	47.0	LOS D	10.3	72.7	1.00	1.12	1.64	24.5
Approach		1512	1.3	1423 ^N ₁	1.2	0.927	18.7	LOS B	11.2	78.8	0.76	0.76	0.95	39.0
West: Valetta Rd (W)														
10	L2	291	2.2	291	2.2	0.323	15.6	LOS B	3.1	22.4	0.63	0.73	0.63	36.1
12	R2	184	1.1	184	1.1	* 0.677	33.3	LOS C	3.4	24.2	0.99	0.86	1.12	35.7
Approach		475	1.8	475	1.8	0.677	22.5	LOS C	3.4	24.2	0.77	0.78	0.82	35.9
All Vehicles		3199	1.2	3111 ^N ₁	1.2	1.581	162.4	LOS F	95.7	675.1	0.80	1.69	2.44	11.4

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

N1 Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

Pedestrian Movement Performance											
Mov ID	Crossing	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	sec		[Ped ped	Dist] m			sec	m	m/sec
South: Findon Rd (S)											
P1	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	50.7	34.3	0.68
North: Findon Rd (N)											
P3	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	51.5	35.3	0.69
West: Valetta Rd (W)											
P4	Full	53	18.4	LOS B	0.1	0.1	0.79	0.79	43.6	32.7	0.75
All Pedestrians		158	22.4	LOS C	0.1	0.1	0.86	0.86	48.6	34.1	0.70

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

APPENDIX C2

FUTURE SCENARIO

MOVEMENT SUMMARY

 Site: TS338 [Valetta/Findon AM Future Scenario - Minor Upgrade (Site Folder: Valetta/Findon)]

 Network: N101 [AM Future Scenario Minor Upgrade (Network Folder: General)]

Valetta/Findon

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 60 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total HV] veh/h	%	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
1	L2	212	0.5	212	0.5	0.400	12.2	LOS B	2.1	15.1	0.73	0.72	0.73	47.5
2	T1	922	1.8	922	1.8	* 1.272	249.0	LOS F	63.3	449.7	0.97	2.85	4.10	6.5
Approach		1134	1.6	1134	1.6	1.272	204.8	LOS F	63.3	449.7	0.92	2.45	3.47	8.9
North: Findon Rd (N)														
8	T1	881	0.1	881	0.1	0.722	10.5	LOS B	11.0	76.9	0.75	0.68	0.75	48.6
9	R2	312	4.7	312	4.7	* 1.187	211.9	LOS F	13.7	100.0	1.00	2.03	3.92	8.5
Approach		1193	1.3	1193	1.3	1.187	63.1	LOS E	13.7	100.0	0.81	1.03	1.58	21.8
West: Valetta Rd (W)														
10	L2	613	2.4	613	2.4	0.921	43.8	LOS D	14.5	103.5	0.92	1.10	1.44	24.0
12	R2	438	0.2	438	0.2	* 1.309	315.8	LOS F	35.6	249.6	1.00	2.63	4.92	9.3
Approach		1051	1.5	1051	1.5	1.309	157.2	LOS F	35.6	249.6	0.95	1.74	2.89	12.5
All Vehicles		3377	1.5	3377	1.5	1.309	139.9	LOS F	63.3	449.7	0.89	1.73	2.62	12.7

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance											
Mov ID	Crossing	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	sec		[Ped ped	Dist] m			sec	m	m/sec
South: Findon Rd (S)											
P1	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	50.7	34.3	0.68
North: Findon Rd (N)											
P3	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	51.5	35.3	0.69
West: Valetta Rd (W)											
P4	Full	53	17.7	LOS B	0.1	0.1	0.77	0.77	42.8	32.7	0.76
All Pedestrians		158	22.1	LOS C	0.1	0.1	0.86	0.86	48.4	34.1	0.71

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

MOVEMENT SUMMARY

 Site: TS338 [Valetta/Findon PM Future Scenario - Minor Upgrade (Site Folder: Valetta/Findon)]

 Network: N101 [PM Future Scenario Minor Upgrade (Network Folder: General)]

Valetta/Findon

Site Category: (None)

Signals - EQUISAT (Fixed-Time/SCATS) Isolated Cycle Time = 60 seconds (Site User-Given Cycle Time)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
1	L2	375	0.3	375	0.3	0.369	10.0	LOS A	2.8	19.9	0.54	0.71	0.54	47.8
2	T1	786	0.1	786	0.1	* 1.173	191.7	LOS F	48.1	337.4	0.99	2.53	3.59	8.2
Approach		1161	0.2	1161	0.2	1.173	133.0	LOS F	48.1	337.4	0.85	1.94	2.60	13.7
North: Findon Rd (N)														
8	T1	1066	0.1	972	0.1	0.719	7.6	LOS A	10.9	76.1	0.67	0.62	0.67	51.1
9	R2	480	1.3	436	1.0	* 1.214	235.1	LOS F	14.2	100.0	1.00	2.13	4.11	7.8
Approach		1546	0.5	1408 ^N ₁	0.4	1.214	78.1	LOS E	14.2	100.0	0.77	1.09	1.74	18.8
West: Valetta Rd (W)														
10	L2	307	2.1	307	2.1	0.409	20.0	LOS B	3.9	28.1	0.75	0.77	0.75	33.7
12	R2	205	0.5	205	0.5	* 0.966	56.7	LOS E	5.4	38.1	1.00	1.29	2.06	29.1
Approach		513	1.4	513	1.4	0.966	34.7	LOS C	5.4	38.1	0.85	0.98	1.27	30.9
All Vehicles		3220	0.5	3082 ^N ₁	0.5	1.214	91.6	LOS F	48.1	337.4	0.81	1.39	1.99	17.5

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

N1 Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

Pedestrian Movement Performance											
Mov ID	Crossing	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	sec		[Ped ped	Dist] m			sec	m	m/sec
South: Findon Rd (S)											
P1	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	50.7	34.3	0.68
North: Findon Rd (N)											
P3	Full	53	24.4	LOS C	0.1	0.1	0.90	0.90	51.5	35.3	0.69
West: Valetta Rd (W)											
P4	Full	53	16.9	LOS B	0.1	0.1	0.75	0.75	42.1	32.7	0.78
All Pedestrians		158	21.9	LOS C	0.1	0.1	0.85	0.85	48.1	34.1	0.71

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

APPENDIX D

FINDON ROAD/HARTLEY ROAD

SIDRA RESULTS

APPENDIX D1

BASE SCENARIO

MOVEMENT SUMMARY

Site: 101 [Hartley Rd/Findon Rd - AM Base Scenario (Site Folder: Valetta/Findon)]

Network: N101 [AM Base Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
2	T1	1209	3.0	954	2.8	1.006	16.1	LOS C	9.0	65.2	1.00	0.00	1.90	45.8
3	R2	295	4.6	232	4.4	0.924	53.3	LOS F	2.5	18.1	0.99	1.46	2.82	24.2
Approach		1504	3.3	1186 ^N ₁	3.1	1.006	23.4	NA	9.0	65.2	1.00	0.29	2.08	40.4
East: Hartley Rd (E)														
4	L2	246	2.6	246	2.6	1.179	195.4	LOS F	11.1	79.6	1.00	4.33	13.37	8.1
6	R2	11	20.0	11	20.0	0.570	301.1	LOS F	0.6	5.2	0.99	1.03	1.15	12.0
Approach		257	3.3	257	3.3	1.179	199.7	LOS F	11.1	79.6	1.00	4.20	12.87	8.4
North: Findon Rd (N)														
7	L2	193	2.7	193	2.7	0.631	6.1	LOS A	13.0	95.4	0.00	0.10	0.00	57.3
8	T1	987	3.7	987	3.7	0.631	0.6	LOS A	13.0	95.4	0.00	0.10	0.00	58.2
Approach		1180	3.6	1180	3.6	0.631	1.4	NA	13.0	95.4	0.00	0.10	0.00	57.9
All Vehicles		2941	3.4	2623 ^N ₁	3.8	1.179	30.8	NA	13.0	95.4	0.55	0.58	2.20	36.4

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:04:37 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

▼ Site: 101 [Hartley Rd/Findon Rd - PM Base Scenario (Site Folder: Valetta/Findon)]

■ Network: N101 [PM Base Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
2	T1	985	0.9	716	0.9	0.377	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	59.8
3	R2	141	3.7	103	4.1	0.634	40.5	LOS E	0.8	5.9	0.96	1.07	1.31	28.2
Approach		1126	1.2	819 ^{N1}	1.3	0.634	5.1	NA	0.8	5.9	0.12	0.13	0.16	54.1
East: Hartley Rd (E)														
4	L2	234	2.3	234	2.3	1.610	581.1	LOS F	24.0	171.1	1.00	5.23	18.64	3.0
6	R2	59	3.6	59	3.6	2.429	1437.6	LOS F	11.4	82.0	1.00	1.91	5.20	2.8
Approach		293	2.5	293	2.5	2.429	753.6	LOS F	24.0	171.1	1.00	4.56	15.93	2.9
North: Findon Rd (N)														
7	L2	64	0.0	64	0.0	0.942	10.9	LOS B	0.0	0.0	0.00	0.03	0.00	52.3
8	T1	1277	0.9	1277	0.9	0.942	6.0	LOS A	0.0	0.0	0.00	0.03	0.00	52.9
Approach		1341	0.9	1341	0.9	0.942	6.2	NA	0.0	0.0	0.00	0.03	0.00	52.8
All Vehicles		2760	1.2	2453 ^{N1}	1.3	2.429	95.0	NA	24.0	171.1	0.16	0.60	1.96	19.5

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:04:41 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

APPENDIX D2

FUTURE SCENARIO

MOVEMENT SUMMARY

Site: 101 [Hartley Rd/Findon Rd - AM Future Scenario (Site Folder: Valetta/Findon)]

Network: N101 [AM Future Scenario Minor Upgrade (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
2	T1	1225	1.5	1059	1.5	0.566	0.1	LOS A	0.0	0.0	0.00	0.00	0.00	59.5
3	R2	309	4.1	268	4.2	0.881	38.4	LOS E	2.2	15.8	0.98	1.37	2.42	28.9
Approach		1535	2.0	1327 ^N ₁	2.0	0.881	7.8	NA	2.2	15.8	0.20	0.28	0.49	51.2
East: Hartley Rd (E)														
4	L2	248	1.3	248	1.3	1.022	77.4	LOS F	4.6	32.2	1.00	2.50	6.40	17.1
6	R2	11	20.0	11	20.0	0.549	285.2	LOS F	0.6	5.0	0.99	1.03	1.14	12.5
Approach		259	2.0	259	2.0	1.022	85.8	LOS F	4.6	32.2	1.00	2.44	6.19	16.5
North: Findon Rd (N)														
7	L2	193	2.7	193	2.7	0.591	6.0	LOS A	9.6	68.2	0.00	0.10	0.00	57.4
8	T1	943	1.0	943	1.0	0.591	0.5	LOS A	9.6	68.2	0.00	0.10	0.00	58.3
Approach		1136	1.3	1136	1.3	0.591	1.4	NA	9.6	68.2	0.00	0.10	0.00	58.0
All Vehicles		2929	1.7	2721 ^N ₁	1.9	1.022	12.5	NA	9.6	68.2	0.19	0.41	0.83	47.2

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:04:53 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

Site: 101 [Hartley Rd/Findon Rd - PM Future Scenario (Site Folder: Valetta/Findon)]

Network: N101 [PM Future Scenario Minor Upgrade (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total veh/h	HV %	v/c	sec		[Veh. veh	Dist] m				km/h
South: Findon Rd (S)														
2	T1	947	0.1	848	0.1	0.443	0.0	LOS A	0.0	0.0	0.00	0.00	0.00	59.7
3	R2	145	2.2	130	2.4	0.815	54.2	LOS F	1.3	9.0	0.98	1.17	1.72	24.0
Approach		1093	0.4	979 ^{N1}	0.4	0.815	7.2	NA	1.3	9.0	0.13	0.16	0.23	52.0
East: Hartley Rd (E)														
4	L2	249	1.7	249	1.7	2.561	1428.2	LOS F	39.8	282.9	1.00	7.48	28.18	1.3
6	R2	59	3.6	59	3.6	3.226	2163.6	LOS F	13.6	98.0	1.00	1.81	4.77	1.9
Approach		308	2.0	308	2.0	3.226	1568.7	LOS F	39.8	282.9	1.00	6.39	23.70	1.4
North: Findon Rd (N)														
7	L2	64	1.6	64	1.6	0.694	6.2	LOS A	14.0	98.3	0.00	0.03	0.00	57.6
8	T1	1297	0.1	1297	0.1	0.694	0.7	LOS A	14.0	98.3	0.00	0.03	0.00	58.8
Approach		1361	0.2	1361	0.2	0.694	1.0	NA	14.0	98.3	0.00	0.03	0.00	58.7
All Vehicles		2762	0.5	2648 ^{N1}	0.5	3.226	185.9	NA	39.8	282.9	0.16	0.82	2.85	12.0

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

^{N1} Arrival Flow value is reduced due to capacity constraint at oversaturated upstream lanes.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:04:57 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

APPENDIX E

FINDON ROAD/GRANGE ROAD SIDRA RESULTS

APPENDIX E1

BASE SCENARIO

MOVEMENT SUMMARY

 Site: TS048 [Grange Rd / Findon Rd - AM Base Scenario (Site Folder: Valetta/Findon)]

Base Case AM

Site Category: (None)

Signals - Actuated Isolated Cycle Time = 120 seconds (Site User-Given Phase Times)

Vehicle Movement Performance														
Mov ID	Turn	INPUT VOLUMES		DEMAND FLOWS		Deg. Satn	Aver. Delay	Level of Service	95% BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV] veh/h	[Total veh/h	HV] %				[Veh. veh	Dist] m				
South: Findon Road (S)														
1	L2	182	10	192	5.5	0.453	36.0	LOS D	9.2	67.2	0.83	0.85	0.83	37.9
2	T1	548	21	577	3.8	* 1.528	470.7	LOS F	106.5	769.8	0.98	2.44	3.40	6.7
3	R2	326	14	343	4.3	* 1.175	220.4	LOS F	43.5	315.8	1.00	1.39	2.28	12.6
Approach		1056	45	1112	4.3	1.528	318.5	LOS F	106.5	769.8	0.96	1.84	2.61	9.4
East: Grange Road (E)														
4	L2	184	12	194	6.5	0.842	59.1	LOS E	19.0	139.3	0.99	0.98	0.99	31.5
5	T1	543	22	572	4.1	0.842	45.6	LOS D	21.0	152.5	0.95	0.86	0.96	34.1
6	R2	173	5	182	2.9	0.630	35.6	LOS D	6.6	47.1	0.96	0.79	0.96	37.3
Approach		900	39	947	4.3	0.842	46.5	LOS D	21.0	152.5	0.96	0.87	0.96	34.1
North: Findon Road (N)														
7	L2	139	4	146	2.9	0.571	54.9	LOS D	12.9	92.7	0.91	0.93	0.91	32.1
8	T1	550	20	579	3.6	1.417	351.7	LOS F	86.4	623.8	0.98	2.08	2.85	8.6
9	R2	257	12	271	4.7	0.941	65.9	LOS E	16.9	123.4	1.00	0.90	1.14	28.5
Approach		946	36	996	3.8	1.417	230.4	LOS F	86.4	623.8	0.98	1.59	2.10	12.3
West: Grange Road (W)														
10	L2	270	8	284	3.0	1.237	242.8	LOS F	88.1	634.0	1.00	1.54	2.57	10.7
11	T1	978	34	1029	3.5	* 1.237	252.8	LOS F	89.8	647.1	1.00	1.87	2.57	10.9
12	R2	324	7	341	2.2	* 0.976	52.6	LOS D	17.6	125.5	1.00	0.96	1.26	31.8
Approach		1572	49	1655	3.1	1.237	209.8	LOS F	89.8	647.1	1.00	1.62	2.30	12.6
All Vehicles		4474	169	4709	3.8	1.528	207.0	LOS F	106.5	769.8	0.98	1.52	2.06	13.1

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Parameter Settings dialog (Site tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Queue Model: SIDRA Standard.

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped ped	Dist] m					
South: Findon Road (S)												
P1	Full	50	53	40.1	LOS E	0.1	0.1	0.82	0.82	69.7	38.5	0.55
East: Grange Road (E)												
P2	Full	50	53	48.7	LOS E	0.2	0.2	0.90	0.90	77.6	37.6	0.48
North: Findon Road (N)												

P3 Full	50	53	40.1	LOS E	0.1	0.1	0.82	0.82	69.9	38.7	0.55
West: Grange Road (W)											
P4 Full	50	53	49.6	LOS E	0.2	0.2	0.91	0.91	79.0	38.2	0.48
All Pedestrians	200	211	44.6	LOS E	0.2	0.2	0.86	0.86	74.1	38.3	0.52

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 12:20:01 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

 Site: TS048 [Grange Rd / Findon Rd - PM Base Scenario (Site Folder: Valetta/Findon)]

Base Case PM

Site Category: (None)

Signals - Actuated Isolated Cycle Time = 120 seconds (Site User-Given Phase Times)

Vehicle Movement Performance														
Mov ID	Turn	INPUT VOLUMES		DEMAND FLOWS		Deg. Satn	Aver. Delay	Level of Service	95% BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV] veh/h	[Total veh/h	HV] %				[Veh. veh	Dist] m				
South: Findon Road (S)														
1	L2	288	4	303	1.4	0.438	35.4	LOS D	12.6	89.5	0.76	0.87	0.76	37.8
2	T1	509	4	536	0.8	1.478	460.2	LOS F	101.5	715.3	0.99	2.46	3.43	6.8
3	R2	203	3	214	1.5	0.746	60.8	LOS E	12.3	86.9	0.98	0.82	0.98	29.7
Approach		1000	11	1053	1.1	1.478	256.8	LOS F	101.5	715.3	0.92	1.67	2.16	11.2
East: Grange Road (E)														
4	L2	285	4	300	1.4	1.300	297.5	LOS F	107.9	765.2	1.00	1.60	2.85	9.2
5	T1	980	15	1032	1.5	* 1.300	306.6	LOS F	107.9	765.2	1.00	1.96	2.86	9.3
6	R2	314	1	331	0.3	* 0.934	46.3	LOS D	15.6	109.3	1.00	0.92	1.12	33.7
Approach		1579	20	1662	1.3	1.300	253.2	LOS F	107.9	765.2	1.00	1.69	2.51	10.8
North: Findon Road (N)														
7	L2	122	3	128	2.5	0.663	55.9	LOS E	14.0	99.1	0.94	0.91	0.94	32.0
8	T1	679	5	715	0.7	* 1.644	496.7	LOS F	124.8	878.9	0.99	2.40	3.35	6.4
9	R2	332	8	349	2.4	* 1.319	343.9	LOS F	57.0	407.3	1.00	1.68	2.93	8.7
Approach		1133	16	1193	1.4	1.644	404.4	LOS F	124.8	878.9	0.99	2.03	2.97	7.6
West: Grange Road (W)														
10	L2	191	6	201	3.1	0.873	58.3	LOS E	24.3	173.1	1.00	0.99	1.03	31.8
11	T1	676	11	712	1.6	0.873	47.2	LOS D	26.2	186.3	0.98	0.91	1.01	33.6
12	R2	305	0	321	0.0	0.976	61.4	LOS E	18.2	127.5	1.00	0.98	1.24	29.6
Approach		1172	17	1234	1.5	0.976	52.7	LOS D	26.2	186.3	0.99	0.94	1.07	32.2
All Vehicles		4884	64	5141	1.3	1.644	240.9	LOS F	124.8	878.9	0.98	1.59	2.20	11.6

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Parameter Settings dialog (Site tab).

Vehicle movement LOS values are based on average delay per movement.

Intersection and Approach LOS values are based on average delay for all vehicle movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Queue Model: SIDRA Standard.

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

* Critical Movement (Signal Timing)

Pedestrian Movement Performance												
Mov ID	Crossing	Input Vol.	Dem. Flow	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Travel Time	Travel Dist.	Aver. Speed
		ped/h	ped/h	sec		[Ped ped	Dist] m					
South: Findon Road (S)												
P1	Full	50	53	39.3	LOS D	0.1	0.1	0.81	0.81	68.9	38.5	0.56
East: Grange Road (E)												
P2	Full	50	53	48.7	LOS E	0.2	0.2	0.90	0.90	77.6	37.6	0.48
North: Findon Road (N)												

P3 Full	50	53	39.3	LOS D	0.1	0.1	0.81	0.81	69.1	38.7	0.56
West: Grange Road (W)											
P4 Full	50	53	49.6	LOS E	0.2	0.2	0.91	0.91	79.0	38.2	0.48
All Pedestrians	200	211	44.2	LOS E	0.2	0.2	0.86	0.86	73.6	38.3	0.52

Level of Service (LOS) Method: SIDRA Pedestrian LOS Method (Based on Average Delay)

Pedestrian movement LOS values are based on average delay per pedestrian movement.

Intersection LOS value for Pedestrians is based on average delay for all pedestrian movements.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 12:20:02 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

APPENDIX E2

FUTURE SCENARIO

APPENDIX F

PRIMARY FINDON ROAD ACCESS POINT SIDRA RESULTS

MOVEMENT SUMMARY

Site: 101 [Site Access/Findon Rd - Stage 1 - AM Future Scenario (Site Folder: Findon Rd Main Access)]

Network: N101 [Site Access AM Future Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV] %	[Total veh/h	HV] %				[Veh. veh	Dist] m				
South: Findon Rd (S)														
1	L2	7	14.3	7	14.3	0.609	6.0	LOS A	0.0	0.0	0.00	0.00	0.00	57.1
2	T1	1153	3.6	1153	3.6	0.609	0.3	LOS A	0.0	0.0	0.00	0.00	0.00	59.3
Approach		1160	3.6	1160	3.6	0.609	0.4	NA	0.0	0.0	0.00	0.00	0.00	59.3
North: Findon Rd (N)														
9	R2	31	3.4	31	3.4	0.106	17.9	LOS C	0.1	1.0	0.85	0.94	0.85	41.5
Approach		31	3.4	31	3.4	0.106	17.9	NA	0.1	1.0	0.85	0.94	0.85	41.5
West: Site Access (W)														
10	L2	28	3.7	28	3.7	0.341	21.1	LOS C	0.5	3.3	0.89	0.99	1.06	38.4
11	T1	46	2.3	46	2.3	0.341	24.8	LOS C	0.5	3.3	0.89	0.99	1.06	34.1
Approach		75	2.8	75	2.8	0.341	23.4	LOS C	0.5	3.3	0.89	0.99	1.06	36.0
All Vehicles		1265	3.6	1265	3.6	0.609	2.1	NA	0.5	3.3	0.07	0.08	0.08	57.0

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:05:01 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

Site: 101 [Site Access/Findon Rd - Stage 2 - AM Future Scenario (Site Folder: Findon Rd Main Access)]

Network: N101 [Site Access AM Future Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total HV] veh/h	%	v/c	sec		[Veh. veh	Dist] m				km/h
North: Findon Rd (N)														
8	T1	1381	2.1	1381	2.1	0.718	0.3	LOS A	0.0	0.0	0.00	0.00	0.00	59.0
Approach		1381	2.1	1381	2.1	0.718	0.3	NA	0.0	0.0	0.00	0.00	0.00	59.0
West: Median														
12	R2	46	2.3	46	2.3	0.306	26.2	LOS D	0.3	2.4	0.92	0.99	1.04	31.0
Approach		46	2.3	46	2.3	0.306	26.2	LOS D	0.3	2.4	0.92	0.99	1.04	31.0
All Vehicles		1427	2.1	1427	2.1	0.718	1.1	NA	0.3	2.4	0.03	0.03	0.03	57.8

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:05:01 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

Site: 101 [Site Access/Findon Rd - Stage 1 - PM Future Scenario (Site Folder: Findon Rd Main Access)]

Network: N101 [Site Access PM Future Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV] %	[Total veh/h	HV] %				[Veh. veh	Dist] m				
South: Findon Rd (S)														
1	L2	16	6.7	16	6.7	0.657	5.9	LOS A	0.0	0.0	0.00	0.01	0.00	57.3
2	T1	1257	0.8	1257	0.8	0.657	0.4	LOS A	0.0	0.0	0.00	0.01	0.00	59.2
Approach		1273	0.8	1273	0.8	0.657	0.5	NA	0.0	0.0	0.00	0.01	0.00	59.1
North: Findon Rd (N)														
9	R2	63	1.7	63	1.7	0.286	24.6	LOS C	0.4	2.8	0.91	0.99	1.03	37.6
Approach		63	1.7	63	1.7	0.286	24.6	NA	0.4	2.8	0.91	0.99	1.03	37.6
West: Site Access (W)														
10	L2	12	9.1	12	9.1	0.210	24.9	LOS C	0.2	1.8	0.91	0.97	0.96	35.4
11	T1	20	5.3	20	5.3	0.210	30.9	LOS D	0.2	1.8	0.91	0.97	0.96	31.1
Approach		32	6.7	32	6.7	0.210	28.7	LOS D	0.2	1.8	0.91	0.97	0.96	32.9
All Vehicles		1367	1.0	1367	1.0	0.657	2.2	NA	0.4	2.8	0.06	0.08	0.07	56.8

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:05:06 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9

MOVEMENT SUMMARY

Site: 101 [Site Access/Findon Rd - Stage 2 - PM Future Scenario (Site Folder: Findon Rd Main Access)]

Network: N101 [Site Access PM Future Scenario (Network Folder: General)]

New Site
Site Category: (None)
Give-Way (Two-Way)

Vehicle Movement Performance														
Mov ID	Turn	DEMAND FLOWS		ARRIVAL FLOWS		Deg. Satn	Aver. Delay	Level of Service	AVERAGE BACK OF QUEUE		Prop. Que	Effective Stop Rate	Aver. No. Cycles	Aver. Speed
		[Total veh/h	HV %	[Total HV] veh/h	%				[Veh. veh	Dist] m				
North: Findon Rd (N)														
8	T1	1279	1.2	1279	1.2	0.661	0.2	LOS A	0.0	0.0	0.00	0.00	0.00	59.2
Approach		1279	1.2	1279	1.2	0.661	0.2	NA	0.0	0.0	0.00	0.00	0.00	59.2
West: Median														
12	R2	63	3.3	63	3.3	0.295	18.9	LOS C	0.3	2.5	0.89	0.98	1.01	35.3
Approach		63	3.3	63	3.3	0.295	18.9	LOS C	0.3	2.5	0.89	0.98	1.01	35.3
All Vehicles		1342	1.3	1342	1.3	0.661	1.1	NA	0.3	2.5	0.04	0.05	0.05	57.9

Site Level of Service (LOS) Method: Delay (SIDRA). Site LOS Method is specified in the Network Data dialog (Network tab).

Vehicle movement LOS values are based on average delay per movement.

Minor Road Approach LOS values are based on average delay for all vehicle movements.

NA: Intersection LOS and Major Road Approach LOS values are Not Applicable for two-way sign control since the average delay is not a good LOS measure due to zero delays associated with major road movements.

Delay Model: SIDRA Standard (Geometric Delay is included).

Gap-Acceptance Capacity: SIDRA Standard (Akçelik M3D).

HV (%) values are calculated for All Movement Classes of All Heavy Vehicle Model Designation.

SIDRA INTERSECTION 9.0 | Copyright © 2000-2020 Akcelik and Associates Pty Ltd | sidrasolutions.com

Organisation: CIRQA PTY LTD | Licence: NETWORK / 1PC | Processed: Monday, 25 October 2021 6:05:06 PM

Project: C:\Users\JeremyBayly\Cirqa Pty Ltd\Cirqa Pty Ltd Team Site - Public\2021\21216 Metcash Site Redevelopment Findon Road Flinders Park\SIDRA\C21216_25Oct21.sip9